



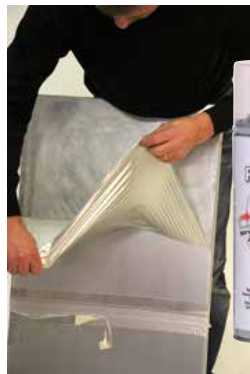

## RUBBERcomp®

Durable coating  
**EASY to undress!**



### MASTON RUBBERcomp® SPRAY

RUBBERcomp® is a multi-purpose, air drying specialty rubber coating. It can be easily applied by spraying. It protects coated items against moisture, acids, abrasion, corrosion, and skidding /slipping, and provides a comfortable, controlled grip.

RUBBERcomp® remains flexible and stretchy over time, and will not crack or become brittle in extreme weather conditions. It has been tested and proven in temperatures from -30°C to +90°C. Easy to peel off. Around four paint layers needed for adequate film thickness.

#### QUALITY AND PROPERTIES

- Base: synthetic rubber polymers
- Can be applied wet-on-wet or wet-on-dry
- Forms an electric, weather and abrasion proof layer
- Remains flexible in wide temperature area
- Easy to strip simply by peeling off the rubber layer
- Degree of gloss: matt, semi-gloss or high gloss

#### PHYSICAL AND CHEMICAL DATA

- Smell: solvent
- Colour: see the label of the can

#### APPLICATION AREAS

- Metal: improved wear resistance, corrosion resistance, vibration reduction, sound damping, electrical insulation
- Wood: seals and prevents cracking.
- Glass: improves shatter-proof features
- Textiles and ropes: weatherproofs, prevents rotting and fraying.
- Plastics: forms an elastic, scratch resistant layer.
- Rubber: forms an elastic, scratch resistant layer.
- Paper and cardboard: provides a weatherproof, tear resistant layer

**EU VOC-CONTENT:** IIB (e), VOC max. 840g/L (2010), VOC 614g/L

#### DRYING

- Drying time (at 20°C, 50% relative air humidity):
- Dust-dry: 10-20 minutes / layer
- Dry to touch: 30-60 minutes / layer
- Completely dry: 4-8 hours
- Total hardness: 48 hours
- Applying in cooler temperatures may affect drying times.

#### INSTRUCTIONS FOR USE:

Clean the surface of oils, grease, dirt, wax and loose rust. Mix well before use. Spray a small test patch on an invisible area. Previously painted 1-component paints might react with RUBBERcomp®. Spray several thin layers. Let the surface dry about 10-20 min. between layers. Note that the drying time will get longer when paint layer gets thicker. Clean the nozzle even in between the layers by turning the can upside down and spray until only propellant comes out. Check the nozzle for eventual concentrated paint around the exit and wipe off the paint with cloth if necessary.

#### STORAGE STABILITY:

36 months if appropriate storage provided (±10°- +25°C, relative air humidity of max. 60%)

#### SIZES:

400 ml spray





## 400 ml spray



Matt black



Black semigloss



White semigloss



Transparent matt



Transparent high gloss



Smoke semigloss



Neon orange semigloss



Neon green semigloss



Blue semigloss



Red semigloss



Gun metal grey semigloss



Wheel silver high gloss



Neon red semigloss



Yellow semigloss



Camo brown matt



Camo green matt



Camo beige matt



Thinner 450ml



Thinner 800ml